

WEDO Wick product sheet

Stabilo Series


The Stabilo series is a flat braided wick construction which combines threads made of the highest grade ring-spun cotton with paper filaments for extra stability. The series comprises a wide range of wick sizes to cover small to large diameter applications.

Specifications:

Candle systems:	<ul style="list-style-type: none"> • Container • Pillar 	Wax blends:	<ul style="list-style-type: none"> • Paraffin • Vegetable waxes • Containing solid color and fragrance 	Chemical treatments:	<ul style="list-style-type: none"> • Stabilo 2-18: P10 (for raw materials/blends with low color and fragrance content) • Stabilo 2-30: P15 (for more complex blends) • Stabilo 20-30: P102 (for more complex blends)
------------------------	---	--------------------	---	-----------------------------	---

Wick sizes	Yield		Candle diameter*	
Series Size	m/kg	yd/lb	mm	inch
Stabilo 2	1250	620	40	1,6
Stabilo 3	1090	540	50	2,0
Stabilo 4	1120	560	50	2,0
Stabilo 5	900	450	50	2,0
Stabilo 6	870	430	55	2,2
Stabilo 7	810	400	55	2,2
Stabilo 8	750	370	55	2,2
Stabilo 9	740	370	55	2,2
Stabilo 10	680	340	60	2,4
Stabilo 12	630	310	60	2,4
Stabilo 14	590	290	65	2,6
Stabilo 16	570	280	70	2,8
Stabilo 18	560	280	70	2,8
Stabilo 20	510	250	70	2,8
Stabilo 22	420	210	75	3,0
Stabilo 24	390	190	75	3,0
Stabilo 26	340	170	75	3,0
Stabilo 28	330	160	80	3,2
Stabilo 30	280	140	80	3,2

* The candle diameters listed are suggestions based on standard results. They should be taken as a starting point for testing purposes only, as burning rates may well differ due to variations between different candle systems.

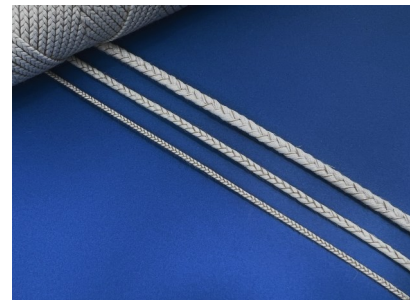

Wedo wicks combine the highest grade wick materials, state of the art braiding and spooling technology, as well as tried, tested and approved chemical treatments. The aim is to provide the cleanest and safest possible burn in the candle blends in question. The materials and processes also ensure consistent product quality from start to finish and from batch to batch.

The self-trimming wick stance minimizes or eliminates carbon deposit formation and greatly reduces afterglow.

Wedo supplies wicks unwaxed on spools, prewaxed on drums or as prewaxed assemblies mounted on sustainers.

Wedo is certified according to EN ISO 9001:2015 and as an accredited supplier only manufactures wicks which fulfil the stringent requirements of the European quality seal RAL GZ 041. All cotton we use is from "Better Cotton" sustainable sources. Wedo also only uses green electricity from renewable sources as certified by the "green electricity +" seal.



This information is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including any existing third party patent rights. In particular, no guarantee of properties in the legal sense is implied. The technical specifications can vary slightly due to normal tolerances in materials and manufacturing. We reserve the right to make any changes according to technological progress or further developments. The customer is not exempted from the obligation to conduct careful inspection and testing of incoming goods. Reference to trade names used by other companies is neither a recommendation, nor is it intended to suggest that similar products could not be used. All our business transactions shall be governed exclusively by our General Sales Conditions.

Westdeutsche Dochtfabrik GmbH & Co. KG - Ravensstrasse 46 - 41334 Nettetal - Germany - Phone +49 2157 12060 - info@wedobraids.com

www.wedobraids.com